AIRLOCKER ARB

AIR OPERATED LOCKING DIFFERENTIAL

RD139

AAM 11.5" Rear

| PARTS L | | | | |
|---------|-----|---|--------------|-------|
| ITEM # | QTY | DESCRIPTION | PART # | NOTES |
| 01 | 1 | FLANGE CAP KIT | 028603SP | |
| 02 | 1 | BONDED SEAL | 160703SP | |
| 03 | 1 | CLUTCH GEAR & WAVESPRING KIT | 050907SP | 5 |
| * | 1 | CLUTCH GEAR & RETURN SPRINGS KIT | 050807SP | 5 |
| 04 | 1 | SPIDER BLOCK | 070402SP | |
| 05 | 1 | LONG CROSS SHAFT | 061501SP | |
| 06 | 4 | PINION GEAR | SEE NOTE | 2 |
| 07 | 4 | PINION THRUST WASHER | SEE NOTE | 3 |
| 08 | 1 | SIDE GEAR | SEE NOTE | 2 |
| 09 | 2 | SIDE GEAR THRUST WASHER | SEE NOTE | 3 |
| 10 | 1 | DIFFERENTIAL CASE (SUITS WAVESPRING ONLY) | 013223SP | 4 |
| * | 1 | DIFFERENTIAL CASE (SUITS RETURN SPRINGS ONLY) | 013203SP | 4 |
| 11 | 1 | COUNTERSUNK SCREW (PK OF 2) | 200214SP | |
| 12 | 1 | RETAINING PIN SET (PK OF 4) | 120601SP | |
| 13 | - | TAPERED ROLLER BEARING | NOT SUPPLIED | |
| 14 | 1 | SEAL HOUSING O-RINGS (PK OF 2) | 160246-2 | |
| 15 | 1 | SEAL HOUSING BRACKET | 220209 | |
| 16 | 1 | SEAL HOUSING KIT | 082102SP | 1 |
| 17 | 1 | WAVESPRING | 150707SP | 5 |
| * | 1 | RETURN SPRINGS KIT | 150107SP | 5 |
| 18 | 1 | SPLINED SIDE GEAR | SEE NOTE | 2 |
| 19 | 2 | SHORT CROSS SHAFT | 061601SP | |
| * | 1 | SEAL HOUSING BRACKET | 220209 | |
| * | 1 | BULKHEAD FITTING KIT (BANJO TYPE) | 170114 | 6 |
| * | 1 | AIR LINE (6mm DIA X 6m LONG) | 170314 | 6 |
| * | 1 | SOLENOID VALVE (12V) | 180103 | |
| * | 1 | SWITCH RR LOCKER | 180224 | |
| * | 1 | CABLE TIE (PK OF 25) | 180305 | |
| * | 1 | OPERATING & SERVICE MANUAL | 210200 | |
| * | 1 | INSTALLATION GUIDE | 2102139 | |

* Not illustrated in exploded view

NOTES


- 1 For replacement O-rings use only BS151 Viton 75.
- 2 Available only as complete 6 gear set # 728K011.
- 3 Available only as complete thrust washer kit #730K01.
- 4 Identify the spring type in your diff and order the correct diff case to replace.
- 5 Replace the spring and/or the corresponding clutch gear with the same type.
 (If spring type is changed, a matching diff case must also be used. See item 10.)
- 6 All diffs produced before serial #17070001 came with 5mm air connection system. For information contact ARB.





RD139

AAM 11.5" Rear

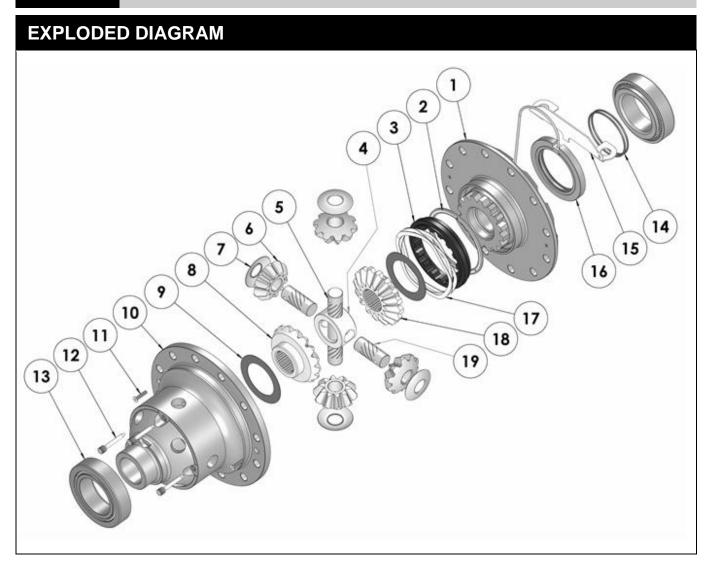

SPECIFICATIONS

Axle Spline 30 tooth, Ø39.1mm [1.54"]

Ratio Supported Al

Ring Gear ID 187.2mm [7.37"] Ring Gear OD 292.1mm [11.5"]

Ring Gear Bolts 12 bolts on Ø220.0mm [8.66"]

Ring Gear Torque 237Nm [175 ft-lb]

Backlash 0.12-0.18mm [0.003-0.005"]

Bearing Cap Torque 280Nm [207 ft-lb]