# AIRLOCKER ARB

## AIR OPERATED LOCKING DIFFERENTIAL

**RD56** 

Land Rover,24 SPL,Banjo\*\*

#### \*\*THIS MODEL WAS SUPERSEDED BY RD128, CROSSED OUT PARTS NOT AVAILABLE

PARTS LIST				
ITEM #	QTY	DESCRIPTION	PART#	NOTES
01	1	FLANGE CAP	<del>020406</del>	
02	1	CLUTCH GEAR	<del>050102</del>	
03	1	DIFFERENTIAL CASE	010404	
04	1	RETURN SPRINGS (PK OF 4)	150101SP	
05	1	RETAINING PIN SET (PK OF 2)	120102SP	
*	1	RETAINING PIN SET (PK OF 2)	120302SP	
06	1	LONG CROSS SHAFT	<del>060103</del>	
07	2	SHORT CROSS SHAFT	<del>060303</del>	
08	1	PISTON	040103SP	
09	1	BONDED SEAL	160701SP	
10	1	CYLINDER CAP ASSEMBLY	<del>030131</del>	
11	1	CYL CAP RETAINING BOLT (PK OF 8)	200205SP	
12	1	LOCKING TAB (8mm) (PK OF 8)	150401SP	
13	1	TAPERED ROLLER BEARING	NOT SUPPLIED	
14	1	SEAL HOUSING RETAINING CLIP	150602SP	
15	1	SPLINED SIDE GEAR	SEE NOTE	2
16	1	PINION THRUST WASHER (PK OF 4)	151101SP	
17	4	PINION GEAR	SEE NOTE	2
18	1	SPIDER BLOCK	<del>070101</del>	
19	1	SIDE GEAR	SEE NOTE	2
20	1	S GEAR THRUST WASHER (PK OF 2)	151001SP	
21	1	ADJUSTER NUT	100201SP	
22	1	SEAL HOUSING KIT	082002SP	
23	1	SEAL HOUSING O-RINGS (PK OF 2)	160235-2	1
*	1	BULKHEAD FITTING KIT (O-RING TYPE)	170111	
*	1	PUSH-IN FITTING (5mm to 1/8"BSPP)	170201SP	
*	1	AIR LINE (5mm DIA X 6m LONG)	170301SP	
*	1	SOLENOID VALVE (12V)	180103	
*	1	SWITCH FR OR RR LOCKER	180225	
*	1	CABLE TIE (PK OF 25)	180305	
*	1	OPERATING & SERVICE MANUAL	210200	
*	1	INSTALLATION GUIDE	210256	

<sup>\*</sup> Not illustrated in exploded view

#### **NOTES**

- 1 For replacement O-rings use only BS133 Viton 75.
- 2 Available only as complete 6 gear set # 728B061
- This model replaces the non-traction control differential carrier with a flange diameter of 174mm [6.85"]. For the traction control version with a flange diameter of 205mm [8.07"] refer to RD57 (Section 2.57).
- 5mm [3/16"] ring gear spacer plate (ARB part# 'RD03A') is available for use with early Land Rover 4.7:1 ratio gear but longer bolts must be used (Land Rover part# 576521).
- Refer to seal housing set-up tech note (Sec. 5.2).
- Refer to Land Rover axle update tech note for 10 to 24 spline conversion information (Sec. 5.14).
- Older RD56 models with O-ring grooves in the cylinder cap use; cylinder cap #030124, seal housing #080202 and O-ring BS129 #160221.






## AIR OPERATED LOCKING DIFFERENTIAL

**RD56** 

Land Rover,24 SPL,Banjo\*\*

\*\*THIS MODEL WAS SUPERSEDED BY RD128, CROSSED OUT PARTS NOT AVAILABLE

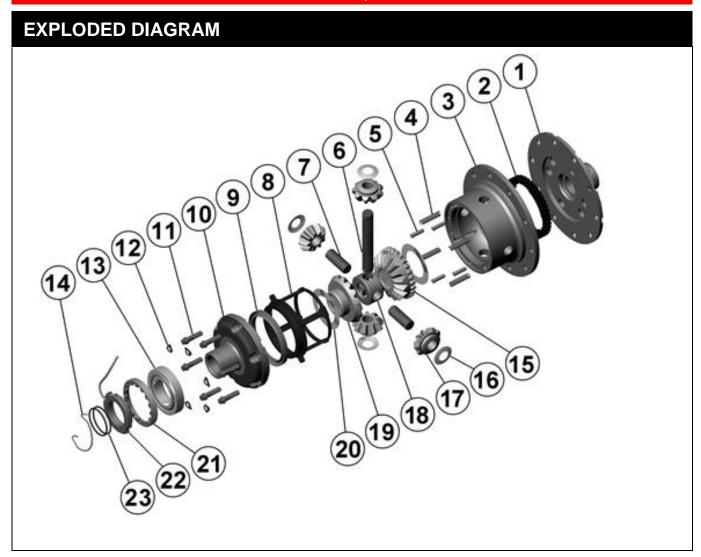

### **SPECIFICATIONS**

Axle Spline 24 tooth, Ø31.5mm [1.24"]

Ratio Supported 3.54:1

Ring Gear ID 125.4mm [4.94"]

Ring Gear Bolts 10 bolts on Ø142mm [5.59"]

Ring Gear Torque 58Nm [43 ft-lb]

Backlash 0.10-0.17mm [0.004-0.007"]

Bearing Cap Torque 90Nm [66 ft-lb]