

# AIR OPERATED LOCKING DIFFERENTIAL

**RD87** 

Suzuki Jimny,FR,22 SPL,8 bolt RG

## \*\*THIS MODEL WAS SUPERSEDED BY RD207, CROSSED OUT PARTS NOT AVAILABLE

PARTS LIST				
ITEM #	QTY	DESCRIPTION	PART #	NOTES
01	1	FLANGE CAP	<del>023702</del>	
02	1	CLUTCH GEAR	<del>050701</del>	
03	1	DIFFERENTIAL CASE	012804	
04	1	RETURN SPRINGS (PK OF 12)	150107SP	
05	1	RETAINING PIN SET (PK OF 3)	120403SP	
06	1	LONG CROSS SHAFT	<del>060106</del>	
07	2	SHORT CROSS SHAFT	060306	
08	1	PISTON	040801SP	
09	1	U-RING	160306SP	
10	1	CYLINDER CAP ASSEMBLY	<del>031303</del>	
11	1	CYL CAP RETAINING BOLT (PK OF 8)	200211SP	
12	1	LOCKING TAB (6mm) (PK OF 8)	150402SP	
13	1	TAPERED ROLLER BEARING	NOT SUPPLIED	
14	1	CLAMPING PLATE	090401	
15	1	SPLINED SIDE GEAR	SEE NOTE	2
16	1	PINION THRUST WASHER (PK OF 4)	151108SP	
17	4	PINION GEAR	SEE NOTE	2
18	1	SPIDER BLOCK	<del>070701</del>	
19	1	SIDE GEAR	SEE NOTE	2
20	1	S GEAR THRUST WASHER (PK OF 2)	151008SP	
21	1	ADJUSTER NUT	100601SP	
22	1	SEAL HOUSING KIT	<del>081401SP</del>	
23	1	SEAL HOUSING O-RINGS (PK OF 2)	160208-2	1
24	3	SEAL HOUSING SCREW	200502	
*	1	RING GEAR SPACER	190103	
*	1	BULKHEAD FITTING KIT (O-RING TYPE)	170111	
*	1	PUSH-IN FITTING (5mm to 1/8"BSPP)	170201SP	
*	1	AIR LINE (5mm DIA X 6m LONG)	170301SP	
*	1	SOLENOID VALVE (12V)	180103	
*	1	SWITCH FR LOCKER	180223	
*	1	CABLE TIE (PK OF 25)	180305	
*	1	OPERATING & SERVICE MANUAL	210200	
*	1	INSTALLATION GUIDE	210287	

<sup>\*</sup> Not illustrated in exploded view

## **NOTES**

- 1 For replacement O-rings use only BS030 Viton 75.
- 2 Available only as complete 6 gear set # 728G021
- Refer to seal housing set-up tech note (Section 5.1).
- For 10 bolt ring gear model refer to RD118 (Section 2.118).






# AIR OPERATED LOCKING DIFFERENTIAL

**RD87** 

Suzuki Jimny, FR, 22 SPL, 8 bolt RG

\*\*THIS MODEL WAS SUPERSEDED BY RD207, CROSSED OUT PARTS NOT AVAILABLE

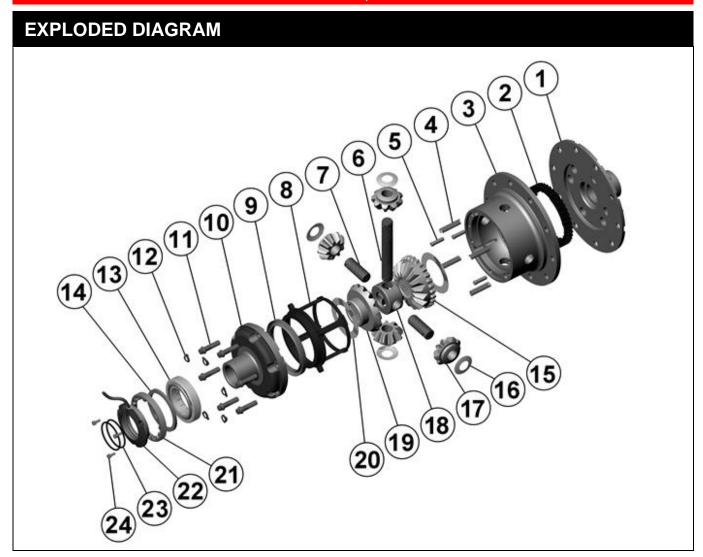

## **SPECIFICATIONS**

**Axle Spline** Ratio Supported Ring Gear ID

Ring Gear Bolts Ring Gear Torque Backlash

Bearing Cap Torque 50Nm [37 ft-lb]

22 tooth, Ø23.9mm [0.94"]

108.0mm [4.25"]

8 bolts on Ø130mm [5.12"]

85Nm [63 ft-lb]

0.10-0.20mm [0.004-0.008"]